



Apex Microwave Co. LTD

Web: www.apextech-mw.com E-mail: sales@apextech-mw.com TEL: [+86-28-85555062](tel:+86-28-85555062)

Add: Yuehu Technology Center, Wuhou District, Chengdu, Sichuan, China

Cavity Combiner A6CC758M2690M35SDL

Revision record

Date	Version	Author	Revision description	Comment
2024/09/11	V1.0	Sam	Created	/

Electrical specification

Parameter	Specifications	
Frequency range (MHz)	In-Out	
	758-821&925-960&1805-1880&2110-2170&2300-2400&2570-2690	
Return loss	≥15dB	
Insertion loss	≤1.5dB	≤3.0dB(2570-2690MHz)
Rejection at all stop bands	≥35dB@748MHz&832MHz&915MHz&980MHz&1785M&1920-1980MHz&2500MHz&2565MHz&2800MHz	
Power handling Max	20W	
Power handling average	2W	
Impedance	50 Ω	



Apex Microwave Co. LTD


Web: www.apextech-mw.com E-mail: sales@apextech-mw.com TEL: +86-28-85555062

Add: Yuehu Technology Center, Wuhou District, Chengdu, Sichuan, China

Mechanical specification

Dimension	L x W x H: 225mm x 172mm x 34mm (40.0mm Max)
Connectors	SMA-Female
Finish	Silver
Notes	Material shall be RoHS 6/6

Outline

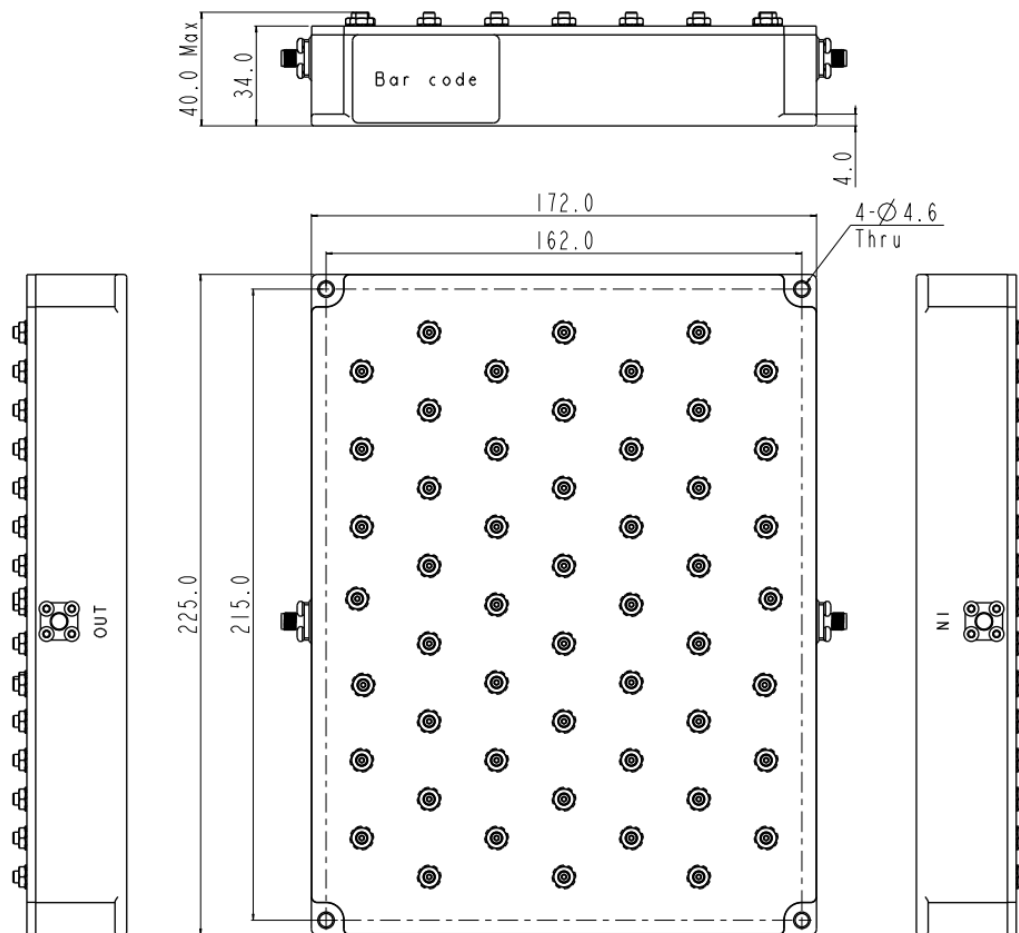



Apex Microwave Co. LTD

Web: www.apextech-mw.com E-mail: sales@apextech-mw.com TEL: +86-28-85555062

Add: Yuehu Technology Center, Wuhou District, Chengdu, Sichuan, China

Simulation curve

